

塑壳干式直流滤波电容器 (定制品) DC-Link Capacitor with plastic shell (Customized products)

■ 外形图 Outline Drawing 外形尺寸 Dimensions (mm)

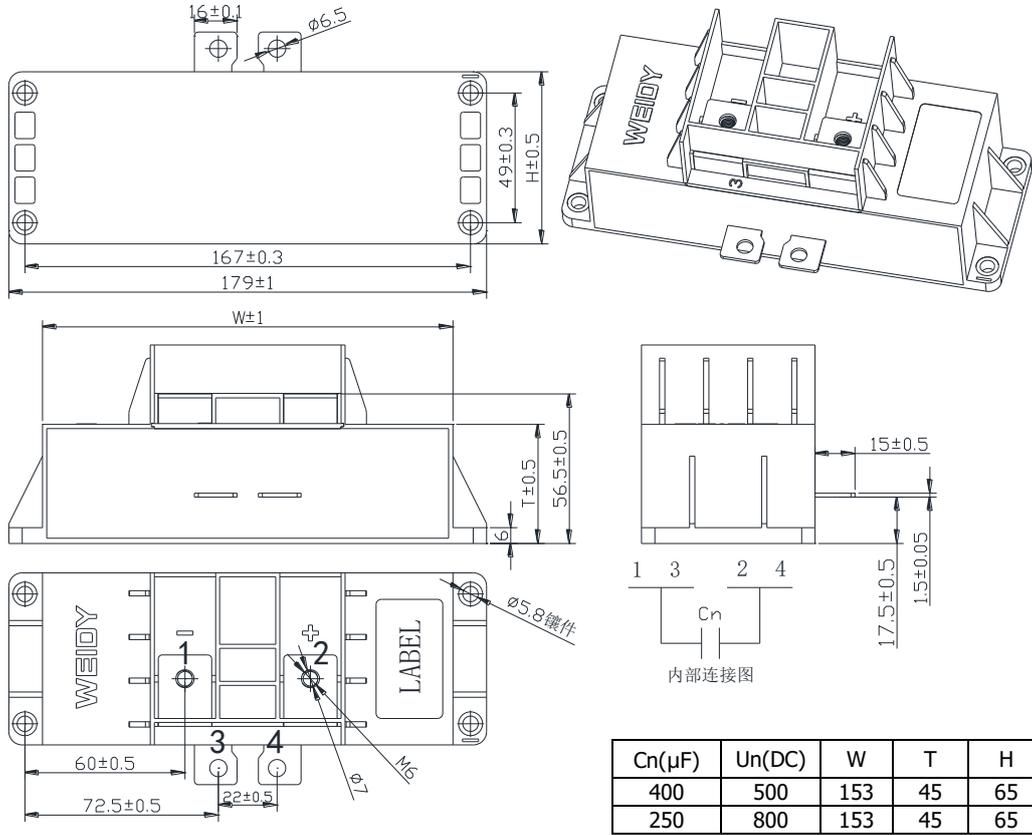


Figure1

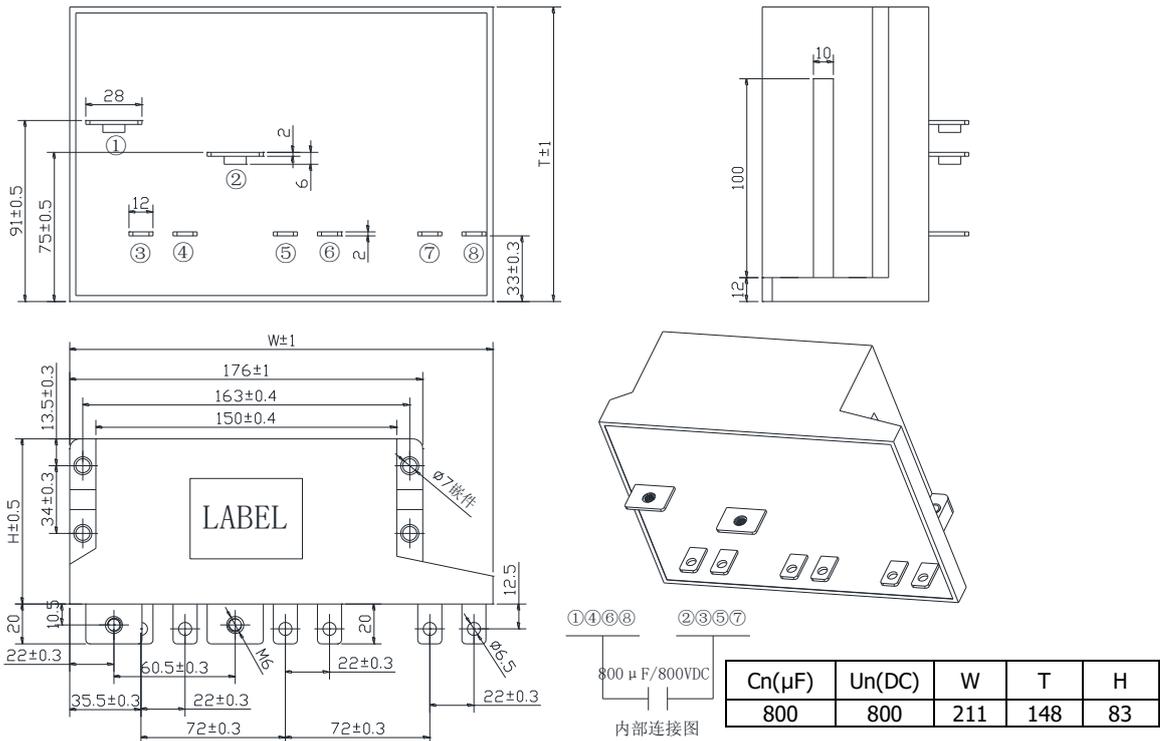


Figure2

■ 特点

- 金属化聚丙烯或安全膜结构
- 塑料外壳，环氧树脂灌封
- 低ESR，容许纹波电流大，低ESL
- 有自愈性，寿命长
- 实现组件化（平滑用·滤波器用·缓冲器用）

■ 主要用途

- 交通工具，如：电动车和混合动力车
- 汽车用或逆变器平滑电路用

■ Features

- Metallized polypropylene or safe film structure
- Plastic case, filled with epoxy resin
- Low ESR, High ripple current capability, and Low ESL
- Self-healing property, Long lifetime
- Possible incorporation of DC-Link, filtering, and snubber capacitor, all together in one module

■ Typical Application

- HEV/EV inverter circuits (DC-Link, filtering, and snubber)
- Cars with smooth or inverter circuit


■ 技术要求 Specifications

| | |
|--|--|
| 引用标准 Reference Standard | IEC 61071 (GB/T 17702) |
| 气候类别 Climatic Category | 40/105/21 |
| 额定电压 Rated Voltage | 450VDC ~ 1200VDC |
| 容量范围 Capacitance range | 100 μ F ~ 1000 μ F |
| 容量偏差 Capacitance Tolerance | J:±5%, K:±10% |
| 介质损耗角正切 Dissipation factor tg δ d | ≤0.0002 (50Hz, 20°C) |
| 有效电流 Effective current | 50A ~ 200A (5kHz, 25°C) |
| 脉冲能力 Withstand strike current ability | dv/dt > 10V/ μ s |
| 杂散电感量 Stray inductance | < 50nH |
| 绝缘电阻 Insulation Resistance | > 5 000s (20°C, 100V, 1min) |
| 测试电压 Voltage Proof | 极间 Between Terminals: 1.5VRdc (10s) |
| | 极壳之间 Terminals to Case: 2*Vi+1000VAC (10S, 50Hz) |
| 阻燃等级 Flame Rating | UL94V-0 |
| 最高使用海拔 Max Altitude | 2000m |
| 预期寿命 Lifetime Expectancy | > 100 000 h (θ hs=70°C, VR) |
| 过电压 overvoltage | 1.1VR:有负荷时间的30% 30% of on-load-dur |
| | 1.15VR:30min/day |
| | 1.2VR:5min/day |
| | 1.3VR: 1min/day |

产品代码说明 Part number system

■ 14 位产品代码说明如下:

The 14 digits part number is formed as follow:



W L G

第 1~3 位: 型号代码

WLG

第 4~6 位: 标称容量

举例 : 427 = 42×10^7 PF = 420 μ F

108 = 10×10^8 PF = 1000 μ F

第 7~10 位: 直流额定电压

举例: 0500=500 V 0800=800V

0900=0900V 1000=1000V

第 11 位: 容量偏差

J=±5%, K=±10%, M=±20%

第 12 位: 引出端代码

5 = 铜片

第 13~14 位: 内部特征码

Digit 1 to 3: Series code

WLG

Digit 4 to 6: Rated capacitance

For example: 427 = 42×10^7 PF = 420 μ F

108 = 10×10^8 PF = 1000 μ F

Digit 7 to 10: DC rated voltage

0500=500 V 0800=800V

0900=0900V 1000=1000V

Digit 11: Capacitance tolerance


J=±5%, K=±10%, M=±20%

Digit 12: Terminals code



5 = copper sheet

Digit 13 to 14: Internal use

■ 电流下降曲线 Current Derating

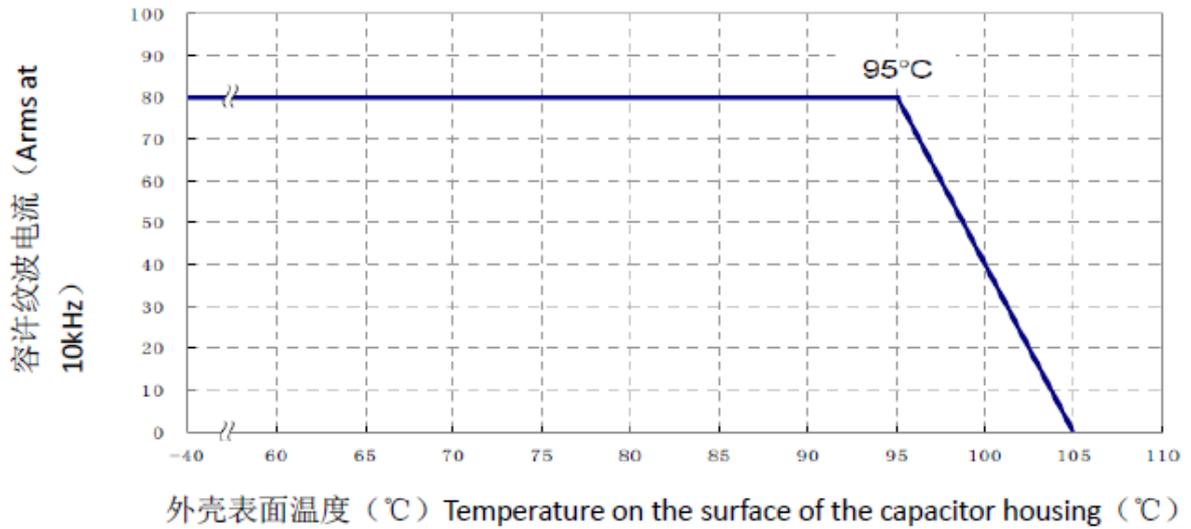

■ 温度特性曲线 Temperature characteristic curve

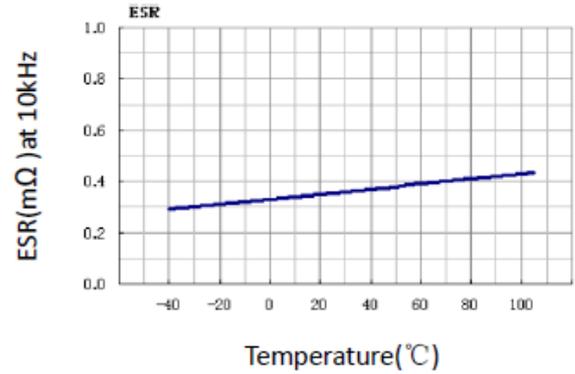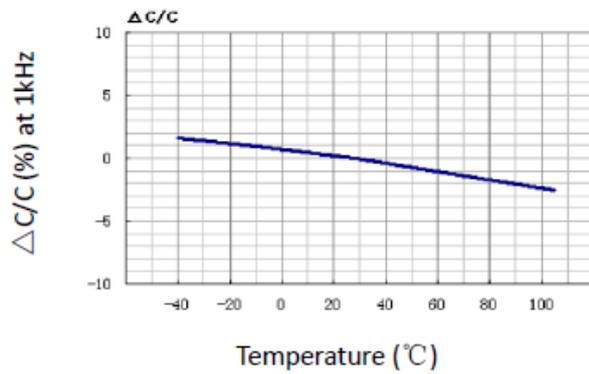

■ 频率特性曲线 Frequency curve

